


NEK6217GK



ENGINEERING CODE
959GA51

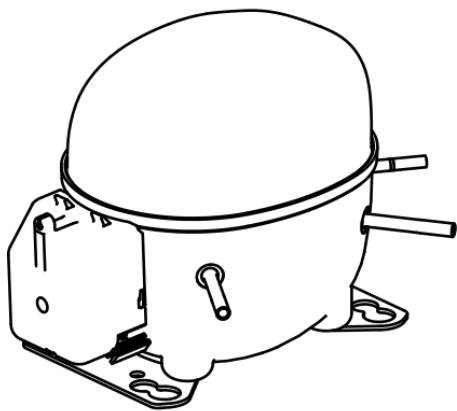

REFRIGERANT
R-404A



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
MBP



MOTOR TYPE
CSCR



STANDARD
ASHRAE



COOLING CAPACITY
1278 W



EFFICIENCY
1.67 W/W

DATA

GENERAL DATA

Model	NEK6217GK
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	3/4
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	11.7 Ω at 25°C
Run Winding Resistance	3.56 Ω at 25°C

MECHANICAL DATA

Displacement	14.28 cm³
Oil Charge	350 ml
Oil Type	ESTER
Oil Viscosity	ISO22
Weight	11.6 Kg

ELECTRICAL COMPONENTS

Start Capacitor	72-88 µf/330 V
Run Capacitor	15.0 µf/440 V
CSR CSIR BOX	Yes
Starting Device Description	RVA403C-123
Overload Protection	T0188/G9

EXTERNAL CHARACTERISTICS

Base Plate	SMALL
Tray Holder	NO

Connector	Internal Diameter	Shape	Material
Suction	8.1 mm	SLANTED 42°	COPPER
Discharge	6.1 mm	STRAIGHT	COPPER
Process	6.1 mm	SLANTED 42°	COPPER

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-404A
Tested Application	MBP
Tested Standard	ASHRAE
Tested Cooling	Fan
Tested Voltage	220 V
Tested Frequency	50 Hz
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
54.4	-6.7	1278	1.67	764	3.82	34.86
Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.						

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	1005	1.89	533	2.69	21.81
-15	1236	2.13	580	2.91	27.02
-10	1510	2.38	636	3.14	33.20
-5	1828	2.63	694	3.39	40.46
0	2190	2.93	749	3.65	48.91
5	2599	3.27	794	3.92	58.65
10	3055	3.71	824	4.20	69.77
Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.					

PERFORMANCE CURVE

Condensing Temperature 45°C


Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	873	1.49	584	2.84	20.94
-15	1077	1.70	632	3.10	25.98
-10	1316	1.89	695	3.37	31.98
-5	1593	2.08	768	3.66	39.03
0	1910	2.27	843	3.96	47.23
5	2266	2.47	916	4.27	56.69
10	2664	2.72	980	4.60	67.52
Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.					

PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	1111	1.56	714	3.61	30.37
-5	1348	1.70	792	3.96	37.17
0	1617	1.84	879	4.32	45.10
5	1920	1.98	971	4.69	54.27
10	2259	2.13	1060	5.07	64.78
Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data generated in accordance to EN 12900:2013 polynomial equation and tolerance guidelines.					

ENVELOPE

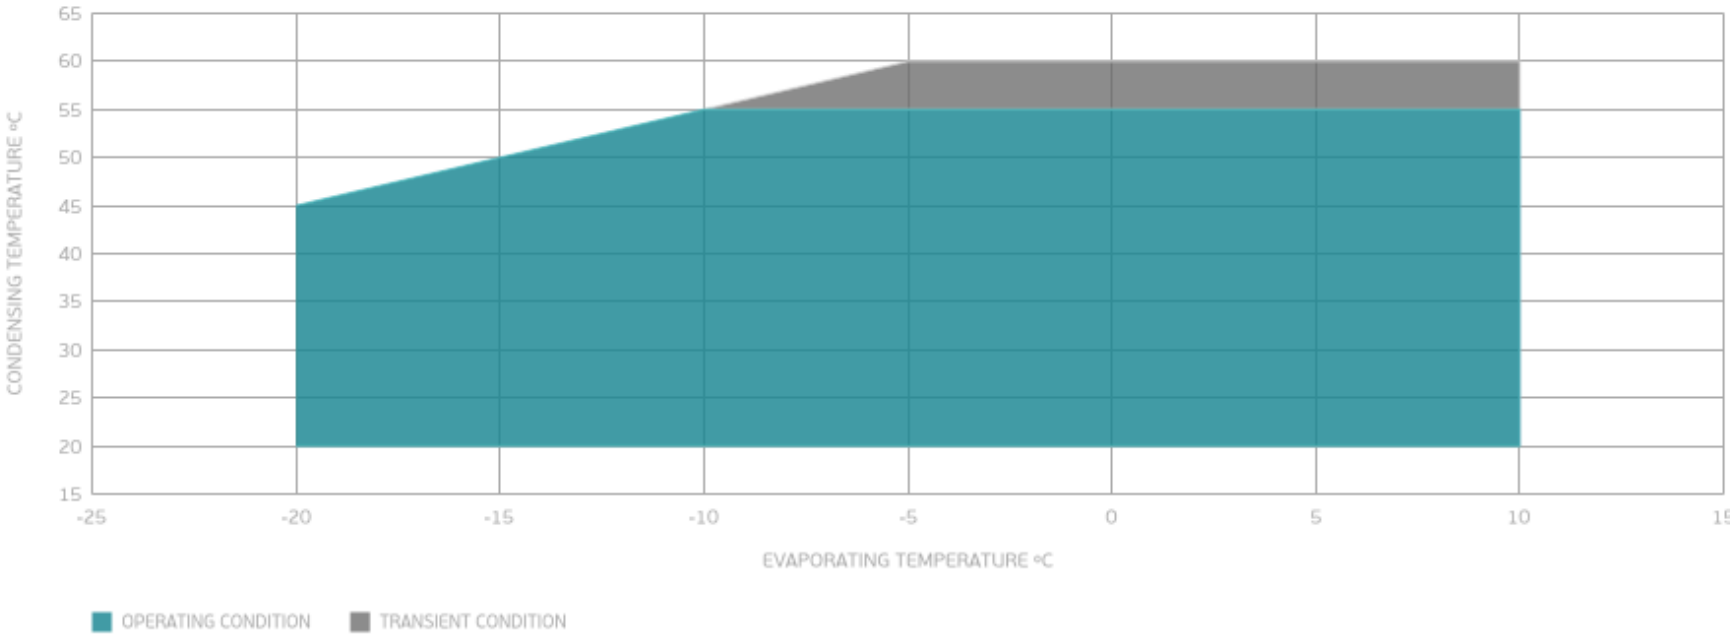

EXTERNAL DIMENSIONS

