


NT6220U



ENGINEERING CODE
842NA04

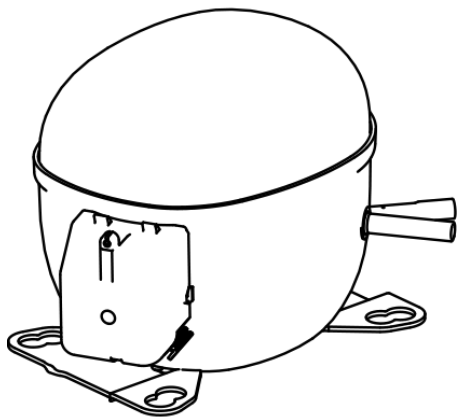

REFRIGERANT
R-290



POWER SUPPLY
220-240 V 50 Hz



APPLICATION
MBP



MOTOR TYPE
CSCR



STANDARD
ASHRAE



COOLING CAPACITY
1226 W



EFFICIENCY
1.79 W/W

DATA

GENERAL DATA

Model	NT6220U
Type	Hermetic Reciprocating
Technology	ON/OFF
Compressor Application	MBP
Expansion Device	Capillary Tube or Expansion Valve
Compressor Cooling	Fan/220
HP	3/4
Starting Torque	HST
Plant	SLOVAKIA

ELECTRICAL DATA

Start Winding Resistance	9.0 Ω at 25°C
Run Winding Resistance	2.3 Ω at 25°C
Locked Rotor Amperage (LRA) 50Hz	30 A

MECHANICAL DATA

Displacement	17.39 cm³
Oil Charge	450 ml
Oil Type	AB
Oil Viscosity	ISO32
Weight	17 Kg

ELECTRICAL COMPONENTS

Start Capacitor	43-53 µf/330 V
Run Capacitor	15.0 µf/440 V
CSR CSIR BOX	Yes
Starting Device Description	RVA4AL3C-560
Overload Protection	T0485/G9

EXTERNAL CHARACTERISTICS

Base Plate	UNI
Tray Holder	NO

Connector	Internal Diameter	Shape	Material
Suction	9.6 mm	VERTICAL	COPPER
Discharge	6.42 mm	VERTICAL	COPPER
Process	6.42 mm	VERTICAL	COPPER

PERFORMANCE

TESTED CONDITIONS

Tested Refrigerant	R-290
Tested Application	MBP
Tested Standard	ASHRAE
Tested Cooling	Fan
Tested Voltage	220 V
Tested Frequency	50 Hz
Max Refrigerant Charge	400 g
Refrigerant Temperature	Dew

RATED POINTS

Condensing Temperature °C	Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
54.4	-6.7	1226	1.79	684	-	14.02
Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data are an indication of performance based simulation.						

PERFORMANCE CURVE

Condensing Temperature 35°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	933	1.88	496	-	8.98
-15	1177	2.18	541	-	11.38
-10	1469	2.52	583	-	14.26
-5	1815	2.94	617	-	17.70
0	2218	3.49	635	-	21.76
Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data are an indication of performance based simulation.					

PERFORMANCE CURVE

Condensing Temperature 45°C


Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-20	780	1.50	519	-	8.12
-15	993	1.75	567	-	10.37
-10	1250	2.01	622	-	13.12
-5	1559	2.31	676	-	16.44
0	1922	2.66	722	-	20.40
Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data are an indication of performance based simulation.					

PERFORMANCE CURVE

Condensing Temperature 55°C

Evaporating Temperature °C	Cooling Capacity W	Efficiency W/W	Power Consumption W	Current A	Gas Flow Rate kg/h
-10	1041	1.62	643	-	11.93
-5	1309	1.85	707	-	15.09
0	1630	2.11	773	-	18.91
Test Condition: Subcooling 8.3 K, Return Gas 35 °C. Data are an indication of performance based simulation.					

ENVELOPE

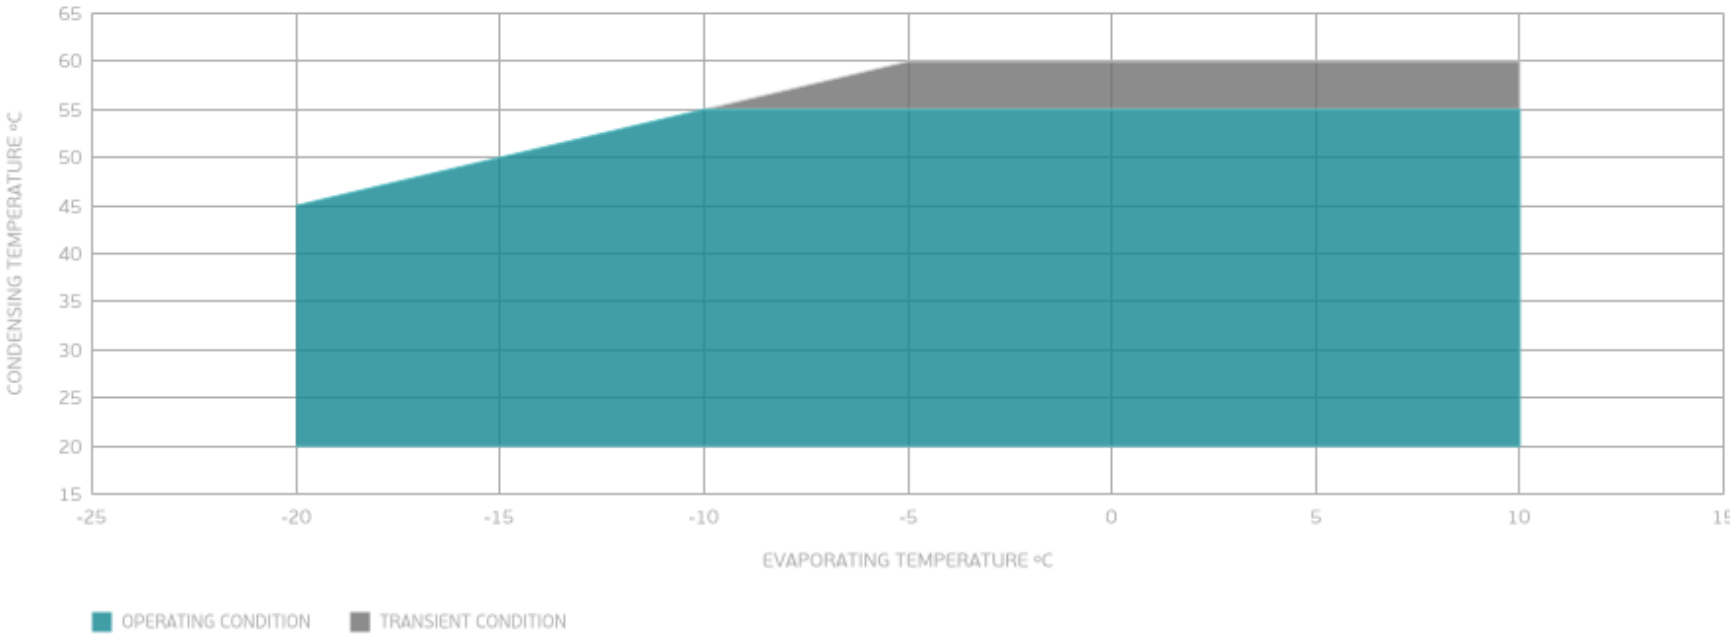

EXTERNAL DIMENSIONS

